

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
974

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

METHOD FOR ADJUSTING A TREATMENT MACHINE

and invented by:

Uwe HASLER

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 28 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
974

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 1
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EJ 929798759 US

BE IT KNOWN that I, **Uwe HASLER**, have invented certain
new and useful improvements in

METHOD FOR ADJUSTING A TREATMENT MACHINE

of which the following is a complete specification:

BACKGROUND OF THE INVENTION

The present invention relates to a method for adjusting a treatment machine, in particular a bottle cleaning machine.

5 More particularly, it relates to a method of adjusting a treatment machine, in which a transporting chain provided for transportation of objects to be treated is guided in loops, in particular meanderingly, through one or several treatment stations in a machine housing and is driven at least at two locations by a drive, so that in a normal operation they are synchronized and adjusted relative to one another, so that the transporting chain in its guides is neither over tightened nor compressed.

10 Such treatment machines are known in particular as bottle cleaning machines. In such bottle cleaning machines bottles are guided in bottle carriers through the cleaning stations of the machine. The machine has individual holders arranged in a horizontal row for receiving of the bottles, which are mounted with their ends on chain members of the roller chains. The roller chains are guided by guiding rails and folded meanderingly in a vertical plane in the machine housing. In order to maintain friction losses, chain forces and wear within certain limits, the transporting chains of known flat cleaning machines are driven at several locations. This is usually performed by means of horizontal and mutually parallel drive

15

20

shafts, on which each corresponding chain pair is arranged for engaging in the transporting chain. Typically two-eight drive shafts are provided.

5 These drive shafts must be driven synchronously, so that the transporting chain is not subjected between two successive drive shafts to significant and usually disadvantageous pressing and pulling forces. Otherwise, the transporting chain and its guiding rails can be damaged or prematurely worn out. The synchronization of the drive shafts can be provided by mechanical means with shafts, transmissions, or chains, or by an electronic synchronous regulation, when several drive motors are provided for each drive shaft or each group of drive shafts.

10 A chain gap must be adjusted between two drives arranged successively in a pulling direction of the transporting chain so that the transporting chain is guided not too loosely and not too tightly. For adjusting the desired chain gap, the relative rotary position of the successive drive shafts is changed. When the synchronization of the drives is performed by mechanical means, the chain gap can be adjusted by displacement of couplings or chain drives. With electronic synchronization, the angular position of the neighboring drives can be changed by the asynchronous actuation of the individual drives.

In known adjustment processes, the chain tensioning is performed by a person involved in maintenance, by optical observation of the chain length. This approach has basically the disadvantage that for performing of the method a trained person is needed, which has a substantial experience in this area. This means that such a method involves high time and labor expenses and also has the risk that the adjustment can be made in erroneous way. Furthermore, for performing of the right chain adjustment, in some cases also the length of the chain inside the cleaning station must be determined. This has the advantage that for this purpose the cleaning fluids must be removed. Since however erroneous adjustments result in a fast wear of the transporting chain, guides and drives, there is therefore a demand for a less expensive adjusting method which is reliable and reproducible at anytime.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an improved method for adjusting treatment machine, which is substantially automated and can be performed in a simple manner without trained and experienced personnel.

In keeping with these objects and with others which will become apparent hereinafter, one feature of present invention resides, briefly stated, in a method which has the following steps.

- a. Two drives which follow one another in a forward direction of the transporting chain are selected;
- b. The selected drives are driven asynchronously so that they tightly pull or compress the chain portion located between them by producing a length difference, and a parameter which is dependent from the drive moment of one or both drives is measured;
- c. When the parameter reaches or exceeds a fixed value, the drives are driven asynchronously in direction of a reduction of the previously produced length difference by a predetermined amount;

- d. The so adjusted relative position of the both drives with respect to one another is subsequently maintained, in particular during the synchronous operation of the drives;
- e. The preceding method steps are used for further drives until the chain lengths are adjusted in all portions to be adjusted.

The inventive method has the advantage that it is composed of simple method steps, which are performed in dependence on simple parameters. For its performance, no trained or experienced personnel is needed. It can be performed automatically in a simple manner. The method is simple and reliable since special measuring devices on or in the machine, for example for measurements of the chain tensioning and position are dispensed with.

The predetermined value for the parameter which is dependent from the drive motor is determined so that the corresponding drive moment substantially exceeds a drive moment which is sufficient for tightening of the corresponding chain portion and nevertheless is not so great that a component of the treatment machine, in particular the transporting chain or the drive motor can be unpermissibly loaded. The amount determined for the reduction of the previously produced length difference is selected so that the chain portion to be adjusted sits in its guides not too loosely and not too tightly.

5 The method is preferably performed outside of the normal operational time, in particular when the treatment machine is maintained at certain times. Basically the method can be performed also during the normal operation, by driving of two drives arranged one after the other in the pulling direction with insignificantly different speeds and forming a parameter which is used for the indication of the tightly pulled or compressed chain portion, for example from the difference between the drive moments of the both drives. During the operation of the treatment machine, the transporting chain, due to wear and pull load, becomes longer after a certain time. Since it is an endless chain, conventionally in a treatment machine a portion is provided for the receipt of the thusly produced excessive chain length. In particular, the transporting chain is suspended so that it more or less sags in form of a loop. It is to be understood that the inventive method is not performed with two drives which are arranged before and after such a compensating portion.

10
15
20 In accordance with another embodiment of the inventive method for a treatment machine with a compensation portion, it is provided that the drive direction of the drive between the chain portion to be adjusted and the compensation portion together with a selected drive and/or all remaining drives together with the other selected drive are operated synchronously. This feature guarantees that for example during a tight pulling of the individual chain portions the neighboring chain portion is not compressed or vice versa. When as provided, all preceding or all

subsequent drives are operated synchronously, such a compression in the neighboring chain portions, which can produce an additional counter moment with falsified the measuring results, is prevented with a corresponding advantage. In known treatment machines, as a rule, all chain portions between each two drives are designed differently with respect to their length and the geometric shape of their guides. In this case, it is especially advantageous when for each chain portion to be adjusted, a special parameter which depends on the drive moment is provided, since the optimal chain adjustment must be provided in general in each chain portion with another drive moment.

The same is true for the amount, by which the drive after reaching of a predetermined drive moment must be "adjusted back". In accordance with a further embodiment of the inventive method, it is provided that for each chain portion to be adjusted, a special predetermined amount for the reduction of the previously obtained length difference is provided.

An accurate adjustment of the corresponding chain portion can be also provided when not only the tightly pulled or compressed condition of the chain portion is determined, but also when both conditions are determined. In a variant of the inventive method it is therefore provided that in the frame of the method steps b and c the chain portion to be adjusted is tightly pulled first for obtaining a first parameter value, and then with

5 registration of the chain length which is required for it, is compressed until it reaches a second parameter value, or vice versa, and the amount of the subsequent adjustment step depends on the register chain length. The adjustment step is also not strictly predetermined from the tightly pulled or compressed adjustment, but instead it depends on the length difference of the chain portion between the compressed and the tightly pulled position, or in other words from both positions.

10 In accordance with a preferable embodiment of the present invention, the drives are controllable electrically, and the method is performed automatically by means of a microprocessor which is programmed in a suitable way. A programmable microprocessor provides nowadays the simplest, multi-facet and cost-favorable possibility for realization of an automatic control. In this case, it is especially advantageous when the drives are provided with rotary sensors for determination of their relative angular positions, the angular positions are stored, and the synchronization is performed from electrical path via the control of the drive. Such an electrical synchronization, requires in particular during the use of a programmable microprocessor, only a small expense without expensive mechanical components.

20 The inventive method can be performed particularly simple and cost favorable when the drives have electric motors whose current

consumption is measured as a drive moment-dependent parameter. In this embodiment, no additional sensors are needed for the measurement of the drive moment. Also, when the invention is described here in connection with the rotatable electric motors, such drives also can include electric linear motors. In this case, the terms rotary angle and drive moment must be replaced with the terms displacement and drive force.

In accordance with a preferable embodiment of the inventive method which is characterized by a particularly simple control process, an electrical drive which is arranged first in a forward direction of the transporting chain after the compensating portion and the chain portion to be adjusted is determined, and the subsequently arranged second electrical drive, are operated synchronously with all subsequent drives in the forward direction, until its current consumption exceeds a predetermined value. Then the second drive together with all subsequent drives are stopped, turned back by a predetermined rotary angle opposite to the forward direction and subsequently fixed, the method is proceeded with the third and all subsequent drives correspondingly until the last chain portion arranged before the compensation portion is adjusted. For the case when the available drive control does not allow return operation of the drive, another method is recommended which also has an especially simple control course. This method starts as the above described method, however after the first stop of the second drive, the first drive is turned by a predetermined rotary

angle in the forward direction and subsequently is fixed together with the second drive. The method is proceeded with the third and all subsequent drives correspondingly, until the last chain portion arranged before the compensation portion is adjusted, and before the chain portion to be adjusted and after the arranged drive it is operated correspondingly synchronously or together.

In accordance with a further embodiment of the invention, the inventive method provides in addition to a correct chain adjustment also a value of the chain elongation required for the normal operation of the treatment machine in running, and thereby the connected chain wear.

In accordance with a further method it is provided that the chain length difference occurring in each adjustment is measured and stored, and their sum is evaluated as an indicator for the total chain elongation average and/or the chain wear. It is to be understood that in a treatment machine with a compensating portion for the chain leg also a modified method can be used, in which the length of the chain sagging is measured in the compensating portion and an indicator for the total chain length and/or chain wear is evaluated.

The novel features which are considered as characteristic for the present invention are set forth in particular in the appended claims. The

invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200

BRIEF DESCRIPTION OF THE DRAWINGS

The single figure of the drawing is a view schematically showing a bottle cleaning machine in accordance with the present invention in a vertical direction.

DESCRIPTION OF PREFERRED EMBODIMENTS

5 The drawing shows a machine housing 1 in which a closed transporting chain 2 is guided in meandering loops. The transporting chain 2 has a great number of bottle carriers 3 which are arranged in a pulling direction one after the other and in a horizontal direction, or in other words perpendicular to the plan of the drawings in rows one near the other. A bottle feeding device 4 provides in a fast sequence a complete row of the bottle carriers 3 in the forward direction 5 with bottles to be cleaned. The transporting chain 2 transport the bottle carriers 3 with the bottles through different treatment stations 6, where they are rinsed with different fluids and cleaned. The cleaned bottles are removed from the bottle carriers 3 by a bottle discharge device 7. The empty bottle carriers 3 then are moved back, and shortly before the bottle feeding device 4 a compensation portion 8 is provided. During the operation it takes up excessive chain lengths produced by wear and pulling action, in form of a variable chain sagging.

10
15
20 For driving the transporting chain 2, separate drives 9, 10, 11, 12, 13, 14 are provided. They are composed of drive shafts which are driven by a not shown electric motor and have a chain sprocket pair engaging the transporting chain 2. The electric motors are synchronized with one another by a not shown electrical control. The control is performed at best by a programmable small computer. The angular positions of the drives 9-14 are

measured by rotary sensors and their relative positions with respect to one another are stored for synchronization of the drives 9-14. With to the synchronous drive it is guaranteed that the transporting chain 2 is not tightly pulled or compressed in its guides 15.

5 In order to adjust the chain in accordance with the present invention, first two drives are selected. Preferably the selected drives include a first drive 9 which is arranged in the forward direction 5 of the transporting chain after the compensating portion 8 and the first chain portion 16 to be adjusted and a subsequent drive 10 in the forward direction 5. The selected drives 9 and 10 are driven asynchronously. In particular, the first drive 9 is fixed and the second drive 10 is driven in the forward direction 5. Together with the second drive 10, also the subsequent drives 11-14 are driven in the forward direction, so that the transporting chain 2 in the subsequent chain portions 17-20 are neither tightly pulled nor compressed.

15 When the drive 10 is driven in the forward direction 5, its current consumption is measured as a measure for the used drive moment. By feeding of the transporting chain 2 by the drive 10 with the simultaneously fixed drive 9, a length difference is produced which leads to tight pulling of the chain portion 16 until it fixedly lies on its corresponding guides 15.

When the current consumption of the drive 10 exceeds a predetermined value, all drives 10-14 are stopped and subsequently turned back over a predetermined rotary angle opposite to the forward direction 5, and the rotary angle in the drive 10 is measured.

5 The predetermined value for the current consumption is naturally determined so that the corresponding drive moment is greater than a drive moment sufficient for tightening of the corresponding chain portion and is smaller than a drive moment which can be damaging for the machine in a corresponding component. The predetermined rotary angle is determined so that the chain portion of the transporting chain 2 to be adjusted sits in its guides 15 neither too loose nor too tight.

Alternatively, with fixed drives 10-14 the drive 10 can be turned over a predetermined rotary angle in the forward direction 5. This second possibility is suitable for example for machines, whose drives can not be operated or can be operated with great difficulties opposite to the forward direction 5.

When now the desired chain length is adjusted in the first chain portion 16, the inventive method provides adjustment of the second chain portion 17, in that on the one hand the drives 9 and 10 and on the other hand the drives 11-14 are synchronously coupled with one another.

First the drives 9 and 10 are stopped and the drives 11-14 are driven together in the forward direction 5, until the chain portion 17 firmly abuts against its drives 15 and until the current consumption of the drive 11 exceeds a predetermined value, which depending on the demand can exceed the value provided for the adjustment of the proceeding chain portions 16 or all subsequent chain portions 18-20.

Now all drives 11-14 are stopped, and subsequently operated over a predetermined rotary value measured at the drive 11, opposite to the forward direction 5. This rotary angle can be also different from the rotary angle provided for the adjustment of the preceding chain portion 16 or all subsequent chain portions 18-20.

As an alternative for turning the drives 11-14 back, it is to be understood that both drives 9 and 10 can be turned together synchronously in the forward direction over the predetermined rotary angle.

After the adjustment of the chain portions 17, in a corresponding continuation of the process the chain portion 18 follows. The drives 9-11 are fixed and the drives 12-14 are driven for tightening of the chain portion 18. The method ends after the adjustment of the last chain portion 20, with the drives 9-13 fixed and the drive 14 is driven alone in the forward direction 5 until the chain portion 20 firmly lies on its guides 15. The

last method step is performed after the current consumption of the drive 14 exceeds a predetermined value. The drive 14 is turned back in this case over a predetermined rotary angle, or as alternative, all drives 9-13 are turned together synchronously over a predetermined rotary angle in the forward direction 5.

The excessive chain length which is produced by elongation or wear of the transporting chain 2, is supplied in the inventive process into the compensation portion 8 and contributes there to a greater sagging of the transporting chain 2. The length of the chain sagging can be measured as an indicator for the chain wear, and in the event of exceeding a fixed chain length, a maintenance of the bottle cleaning machine is performed before it can lead to unpredictable and costly failures.

When the bottle cleaning machine is however controlled by a programmable microprocessor, a special measurement of the chain sagging can be dispensed with. In particular, chain length differences occurring during each adjustment can be measured during the adjustment and stored. Their sum can be evaluated as an indicator for the total chain length and thereby the chain wear. This can be provided in particular in that the relative rotary angle of the second drive arranged in a sequence before and after the adjustment of the enclosed chain portion can be determined, and the angle difference calculated and stored.

For example the drives 9 and 10 before the adjustment of the first chain portion are driven always synchronously, so that their both rotary angles are fixedly coupled. During the adjustment of the chain portion 16, this coupling is removed and a relative displacement of the angular positions occurs by an amount which is dependent from the length of the chain portion 16. After the adjustment the both drives 9 and 10 are again coupled synchronously with one another, while however the relative angular position of the drive 9 to the angular position of the drive 10 is changed by an angle difference. The angle difference is stored similarly to the angle differences which occur during the adjustment of the subsequent chain portions 17-20. The sum of all angle differences is then added to the total sum of the angle differences from other method steps. This total sum is a measure for the total chain length and thereby for the chain wear.

The inventive method can be performed completely automatically, in particular, by controlling with a programmable microprocessor, for example outside of the normal operational type of the bottle cleaning machine. Basically, the method can be performed also during the normal operation of the bottle cleaning machine.

In this case, the synchronously running drives 9-14 are subdivided into two synchronously running groups. When for example the chain portion 18 must be adjusted, on the one hand the drives 9-11 and on

the other hand the drives 12-14 are driven synchronously with one another. The electrical control increases for example the rotary speed of the drives 12-14 which are coupled with one another and thereby a displacement of the relative rotary angle with respect to the drives 9-11 which are operated being coupled with one another.

The rotary angle difference can be determined in a simple manner in that, a rotary angle which is read by the rotary sensor of the drive 12 is evaluated positively and the rotary angle determined by the rotary sensor of the drive 11 is evaluated negatively. In particular when the rotary angle is provided digitally or as a pulse sequence, the subtraction can be performed in a simple manner. For example an electronic forward/rearward counter which counts the pulses supplied by the rotary sensor of the drive 12 forwardly and counts the pulses supplied by the rotary sensor of the drive 11 rearwardly can be used. The counter content is always composed of a count which is proportional to the rotary angle difference.

With these steps, the chain portion 18 is straightened and fixedly lies on its guides 15. This leads to an increased friction and thereby to an increased current consumption of the drive 12. When now for example the current consumption of the drive 12, the drive 11 or its sum or difference exceeds a predetermined value, the angle difference is stored and thereafter the coupled drives 12-14 are driven with lower speed, until the angle

difference for the group of the drives 9-11 is reduced by a predetermined amount. Now the chain length of the chain portion 18 is properly adjusted, and all drives 9-14 are again synchronized with one another. After this, the method can continue with each other chain portion, until it is finished.

5 It will be understood that each of the elements described above, or two or more together, may also find a useful application in other types of constructions differing from the types described above.

10 While the invention has been illustrated and described as embodied in method for adjusting a treatment machine, it is not intended to be limited to the details shown, since various modifications and structural changes may be made without departing in any way from the spirit of the present invention.

15 Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can, by applying current knowledge, readily adapt it for various applications without omitting features that, from the standpoint of prior art, fairly constitute essential characteristics of the generic or specific aspects of this invention.

 What is claimed as new and desired to be protected by Letters Patent is set forth in the appended claims.

CLAIMS

1 1. A method of adjusting a treatment machine in which a
2 transporting chain for transporting objects to be treated is guided in loops
3 through at least one treatment station in a machine housing and driven at
4 least at two locations by drives which in a normal operation are synchronized
5 and adjusted relative to one another so that the transporting chain in its
6 guides is neither tightly pulled nor compressed, the method comprising the
7 steps of:

- 8 a. Selecting two drives which follow one another in a forward
9 direction of the transporting chain;
10 b. asynchronously driving the selected drives, so that a chain
11 portion located therebetween is tightly pulled or compressed by
12 producing a length difference, and measuring a parameter
13 which is dependent from a drive moment of one or both
14 selected drives;
15 c. when the parameter reaches or exceeds a fixed value,
16 operating the drives asynchronously for reducing the
17 previously produced length difference by a predetermined
18 amount;

- 1 d. Subsequently maintaining the adjusted relative position of the
2 both drives relative to one another, with asynchronous
3 operation of the drives; and
4 e. using the preceding steps for further drives, until chain lengths
5 in all chain portions to be adjusted are adjusted.

1 2. A method as defined in claim 1; and further comprising the
2 step of operating synchronously a drive arranged in a drive direction between
3 a chain portion to be adjusted and a compensating portion of the transporting
4 chain for receiving an excessive chain length, together with a selected drive
5 and/or all remaining drives together with the other selected drive.

1 3. A method as defined in claim 1; and further comprising
2 providing a parameter which is independent from the drive moment, for each
3 chain portions to be adjusted.

1 4. A method as defined in claim 1; and further comprising
2 providing a special predetermined amount for a reduction of the previously
3 produced length difference for each chain portion to be adjusted.

1 5. A method as defined in claim 1; and further comprising, first
2 pulling tight the chain portion adjusted in the steps b and c until reaching a
3 first parameter, and then with registering the chain lengths which is required
4 for it, compressing the chain portion until reaching a second parameter value
5 or vice versa; and providing an amount of subsequent adjusting steps in
6 dependence on the registered chain length.

1 6. A method as defined in claim 1; and further comprising
2 electrically controlling the drives; and performing the method automatically
3 by a programmable microprocessor.

1 7. A method as defined in claim 6; and further comprising
2 providing the drives with rotary sensors for determination of their relative

1 angular positions; storing the angular positions; and performing the
2 synchronization of an electrical path by controlling the drives.

1 8. A method as defined in claim 1; and further comprising
2 providing the drives with electric motors; and measuring current consumption
3 of the electric motors as parameters which are dependent from drive
4 moments.

1 9. A method as defined in claim 1; and further comprising
2 forming the drives as electrical drives; fixing a first electrical drive arranged
3 in the forward direction of said transporting chain after a compensation
4 portion and before a chain portion to be adjusted; operating a subsequently
5 arranged second electrical drive synchronously with all subsequent electrical
6 drives in the forward direction until its current consumption exceeds a
7 predetermined value; then stopping the second drive together with all
8 subsequent drives, turning them back by predetermined rotary angle
9 opposite to the forward direction, and subsequently stopping; continuing the
10 method with a third and subsequent drives correspondingly until a last chain
11 portion arranged before the compensation portion is adjusted.

1 10. A method as defined in claim 1; and further comprising
2 forming the drives as electrical drives; fixing a first electrical drive arranged
3 in the forward direction of said transporting chain after a compensation
4 portion and before a chain portion to be adjusted; operating a subsequently
5 arranged second electrical drive in the forward direction until its current
6 consumption exceeds a predetermined value, stopping the second drive
7 together with subsequent drives and turning the first drive by a
8 predetermined rotary angle in the forward direction, and subsequently fixing
9 it together with said second drive; continuing the method with a third and all
10 subsequent drives until a last chain portion arranged before the
11 compensation portion is adjusted; and operating the chain portions adjusted
12 previously and the drives arranged after synchronously or fixing them
13 together.


1 11. A method as defined in claim 1; and further comprising
2 measuring chain length differences occurring during each adjustment; storing
3 the measured chain length differences; and evaluating their sum as an
4 indicator for a total chain length and/or chain wear.

1 12. A method as defined in claim 11; and further comprising
2 measuring a length of a chain sagging in a compensation portion and
3 evaluating it as an indicator for a total chain length and/or chain wear.

1 13. A method as defined in claim 1; and further comprising
2 using a programmable control for performing the adjustment.

ABSTRACT OF THE DISCLOSURE

A method of adjusting a treatment machine in which a transporting chain for transporting objects to be treated is guided in loops through at least one treatment station in a machine housing and driven at least at two locations by drives which in a normal operation are synchronized and adjusted relative to one another so that the transporting chain in its guides is neither tightly pulled nor compressed, the method has the steps of selecting two drives which follow one another in a forward direction of the transporting chain; asynchronously driving the selected drives, so that a chain portion located therebetween is tightly pulled or compressed by producing a length difference, and measuring a parameter which is dependent from a drive moment of one or both selected drives, when the parameter reaches or exceeds a fixed value, operating the drives asynchronously for reducing the previously produced length difference by a predetermined amount, subsequently maintaining the adjusted relative position of the both drives relative to one another, with asynchronous operation of the drives, and using the preceding steps for further drives, until chain lengths in all chain portions to be adjusted are adjusted.

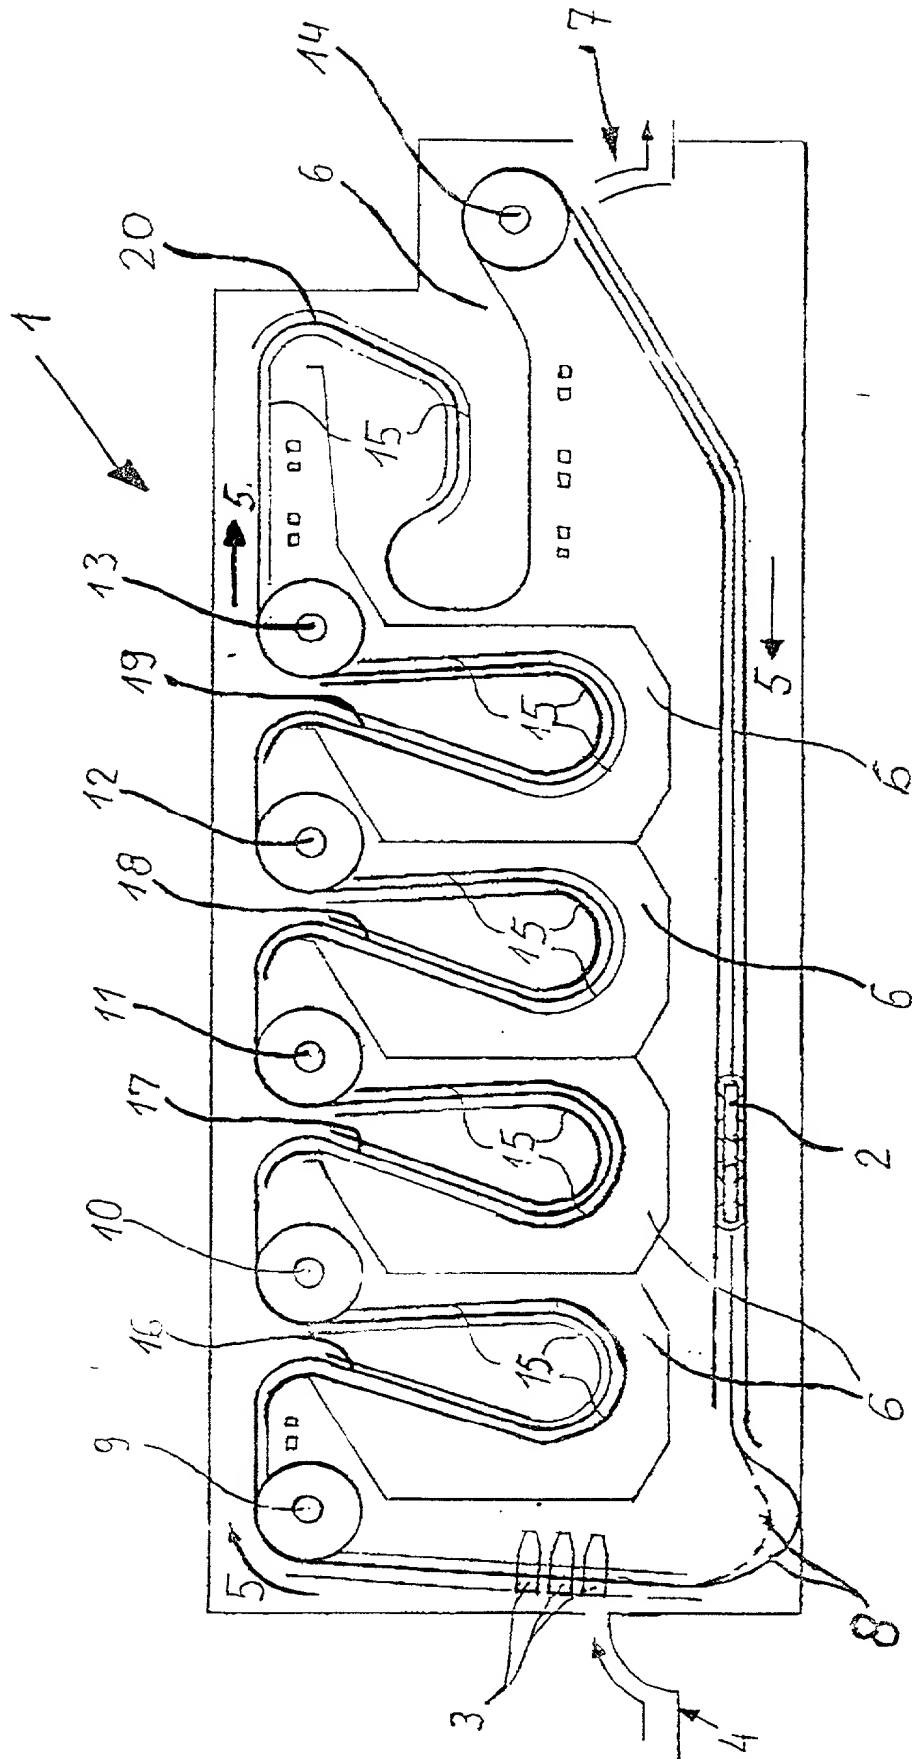

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney for Patent Application Erklärung für Patentanmeldungen mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

Uwe HASLER

Uwe HASLER

dass mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, dass ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

VERFAHREN ZUR EINSTELLUNG EINER
BEHANDLUNGSMASCHINE

METHOD FOR ADJUSTING A TREATMENT
MACHINE

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

the specification of which is attached hereto unless the following box is checked:

- ☐ wurde angemeldet am _____
unter der US-Anmeldenummer oder unter der
Internationalen Anmeldenummer im Rahmen des
Vertrags über die Zusammenarbeit auf dem Gebiet des
Patentwesens (PCT)
_____ und am
_____ abgeändert (falls
zutreffend).

- ☐ was filed on _____
as United States Application Number or PCT
International Application Number
_____ and was amended on
_____ (if applicable).

Ich bestätige hiermit, dass ich den Inhalt der oben angegebenen Patentanmeldung, einschliesslich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, § 1.56 von Belang sind.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Code of Federal Regulations, Regulations, § 1.56.

663071 664466

German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications
(Frühere ausländische Anmeldungen)

(Number) (Country)
(Nummer) (Land)

(Number) (Country)
(Nummer) (Land)

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
Priorität nicht beansprucht

(Day/Month/Year Filed) ☒
(Tag/Monat/Jahr der Anmeldung)

(Day/Month/Year Filed) ☐
(Tag/Monat/Jahr der Anmeldung)

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application No.) (Filing Date)
(Akzenzeichen) (Anmeldetag)

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäss dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

(Application No.) (Filing Date)
(Akzenzeichen) (Anmeldetag)

(Application No.) (Filing Date)
(Akzenzeichen) (Anmeldetag)

Ich erkläre hiermit, dass alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner dass ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, dass wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäss § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und dass derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status) (patented, pending, abandoned)
(Status) (patentiert, schwebend, aufgegeben)

(Status) (patented, pending, abandoned)
(Status) (patentiert, schwebend, aufgegeben)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

German Language Declaration

VERTRETUNGSVOLMACHT: Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (älte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: *(Name(n) und Registrationsnummer(n) auflisten)*

Michael J. Striker, Registration No. 27233
Ilya Zborovsky, Registration No. 28563
William G. Valance, Registration No.: 28275

Postanschrift
STRIKER, STRIKER & STENBY
103 East Neck Road
Huntington, NY 11743

Telefonische Auskünfte (Name und Telefonnummer)

Michael J. Striker
(516) 549 4700

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*

Michael J. Striker, Registration No. 27233
Ilya Zborovsky, Registration No. 28563
William G. Valance, Registration No.: 28275

Send Correspondence to:
STRIKER, STRIKER & STENBY
103 East Neck Road
Huntington, NY 11743

Direct Telephone Calls to:

Michael J. Striker
(516) 549 4700

Vor- und Zuname des einzigen oder ersten Erfinders Uwe HASLER	Full name of sole or first inventor Uwe HASLER
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz Liethberg 3, 22529 Hamburg, Germany	Residence Liethberg 3, 22529 Hamburg, Germany
Staatsangehörigkeit DE	Citizenship DE
Postanschrift Liethberg 3, 22529 Hamburg, Germany	Post Office Address Liethberg 3, 22529 Hamburg, Germany
Vor- und Zuname des zweitens Erfinders (falls zutreffend)	Full name of second joint inventor, if any
Unterschrift des Erfinders Datum	Second inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

66307-66460